



HDR HDMI 2.0 Switch

JHS13/3X1/A-R/60HZ 1080P

User manual

Thank you for purchasing this product. For optimum performance and safety, please read these instructions carefully before connecting, operating or adjusting this product. Please keep this manual for future reference.

I. Introduction

This is a high performance 3 HDMI input and 1 HDMI output switch. It supports HDCP repeater functions and fast switching between any of the HDMI input ports. The system supports all 3D TV formats in addition to all HDTV formats up to 4Kx2K. Furthermore, the remote control gives uses complete control over the selection of sources and makes the device incredibly user friendly.

II. Features

Compliant with HDMI 2.0, DVI 1.0 standards.

Support 4Kx2K/60HZ, HDCP 2.2.

Audio support:

Dolby TrueHD

DTS-HD Master Audio 7.1CH

Low power consumption, does not require an external power supply

III. Package

HDMI 2.0 3by1 Switcher

Remote control


Operation Manual

USB cable

IV. Specifications

Frequency Bandwidth	18Gbps
Input Ports	3 HDMI Female ports,
Output port	1 HDMI Female port
HDMI Audio Output	PCM2, 5.1, 7.1CH, Dolby 5.1, DTS5.1, D-TrueHD, DTS-HD
ESD Protection	Human Body Model: $\pm 8\text{kV}$ (air-gap discharge) $\pm 4\text{kV}$ (contact discharge)
Power Consumption	0.2W
Operating Temperature	$0^{\circ}\text{C} \sim 40^{\circ}\text{C} / 32^{\circ}\text{F} \sim 104^{\circ}\text{F}$
Storage Temperature	$-20^{\circ}\text{C} \sim 60^{\circ}\text{C} / -4^{\circ}\text{F} \sim 140^{\circ}\text{F}$

V. Operating and connection

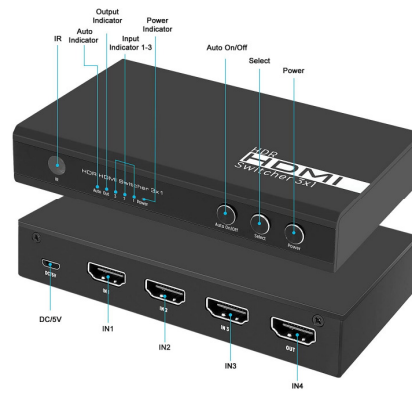

1. Connect 3 HDMI cables from HDMI source device into HDMI switch input
2. Connect 1 HDMI cables from HDMI source device into HDMI switch output
3. Connect 5V/1A power adapter to the HDMI switch
4. Press the button of the Select for 5 seconds it can switch the automatic switching mode. When the light flashes continuously, it means that you are using the automatic switching mode
5. IR The buttons on the remote control are switch button, return button, button 1, button 2, button 3 and time control buttons, respectively 10s, 15s, 20s. The time control button can choose the interval time of automatic switching